

# DH-HAC-HFW1239MH(-A)-LED

2MP Full-color HDCVI Bullet Camera



- 24/7 color imaging
- 50 m illumination distance
- Max. 30 fps@1080p
- CVI/CVBS/AHD/TVI Switchable
- Built-in mic(-A)
- 3.6mm fixed lens (6mm Optional)
- IP67, 12V±30% DC



## System Overview

Experience 1080p full HD color video and the simplicity of reusing existing coaxial infrastructure with HDCVI. The full-color starlight HDCVI camera presents a high quality color image with rich details even in total darkness conditions. It offers various fixed lens models with a multi-language OSD and HD/SD switchable output. It adopts two powerful warm white LED illuminators, covering an effective range up to 50 m (164.04 ft). The LEDs switch on automatically in darkness to capture detail-packed full-color images 24/7, ensuring authentic identification of objects. It is an ideal choice for applications such as schools, retail centers and parking lots.

## Functions

### Full-color

The camera adopts F1.6 large aperture lens and 1/2.8" high performance sensor. With higher amount of absorbed light and advanced image processing algorithm, the camera can present 24/7 colored image that provides color details to accurately identify people or objects in low light conditions.

### Warm Supplemental lights

With two warm supplemental LED lights, the camera is able to provide a colorful and vivid image even in total darkness. It also provides visible By default, the camera is set to smart light mode, in which the camera can automatically adjust the exposure time and light sensitivity simultaneously to avoid overexposure of the objects in the image center. Also, the sensitivity and intensity of the LED lights can be remotely controlled by OSD menu.

### Broadcast-quality Audio

Audio information is used as supplementary evidence in video surveillance applications. The HDCVI camera supports audio signal transmission over coaxial cable. In addition, it adopts unique audio processing and transmission technology that best restores source audio and eliminates noise, guaranteeing the quality and effectiveness of collected audio information.

\*Broadcast-quality audio is available for some models of HDCVI cameras.

## 4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e. video, audio\*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the HCVR, such as sending control signal or triggering alarm. Moreover, HDCVI technology supports PoC for construction flexibility.

\*Audio input is available for some models of HDCVI cameras.

## Long Distance Transmission

HDCVI technology guarantees long-distance and real-time transmission without any loss. It supports up to 800m for 1080p Full HD video via coaxial cable, and up to 300m via UTP cable

\*Actual results verified by real-scene testing in Dahua's test laboratory.

## Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables full HD video surveillance without the hassle of configuring a network.

## Multiple-formats

The camera supports multiple video formats including HDCVI, CVBS and other two common HD analog formats in the market. The four formats can be switched over through OSD menu or by PFM820(UTC controller). This feature makes the camera to be compatible with most end users' existing HD/SD DVRs.

## Protection

The camera's outstanding reliability is unsurpassed due to its rugged design. The camera is protected against water and dust with IP67 ranking, making it suitable for indoor or outdoor environments.

Technical Specification					
Dahua Camera					
Image Sensor		1/2.8 inch CMOS			
Effective Pixels		1920 (H)×1080 (V), 2MP			
Electronic Shutter Speed		PAL:1/25 s–1/100000 s NTSC:1/30 s–1/100000 s			
Minimum Illumination		0.005 Lux/F1.6, 0 Lux white Light on			
Fill Light (White Light) Distance		Distance up to 50 m (164.04 ft)			
Fill Light On/Off Control		Auto; manual			
Fill Light Number		2			
Pan/Tilt/Rotation Range		Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360°			
Lens					
Lens Type		Fixed-focal			
Mount Type		M12			
Focal Length		3.6 mm; 6 mm			
Max. Aperture		F1.6			
Angle of View		3.6 mm: 103.6° × 86.9° × 46.3° (diagonal × horizontal × vertical) 6 mm: 63° × 54° × 29° (diagonal × horizontal × vertical)			
Iris Type		Fixed iris			
Close Focus Distance		3.6 mm: 1.2m (3.94ft) 6 mm: 2.5 m (8.2 ft)			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	3.6 mm	55.2 m (181.1 ft)	22.1 m (72.5 ft)	11.0 m (36.1 ft)	5.5 m (18.0 ft)
	6 mm	82.8 m (271.65 ft)	33.1 m (108.59 ft)	16.6 m (54.46 ft)	8.3 m (27.23 ft)
Video					
Video Frame Rate		CVI: PAL: 1080p@25 fps, 720p@25 fps, 720p@50 fps; NTSC: 1080p@30 fps, 720p@30 fps, 720p@60 fps AHD: PAL: 1080p@25 fps,720p@25 fps; NTSC: 1080p@30 fps,720p@30 fps TVI: PAL: 1080p@25 fps,720p@25 fps,720p@50 fps; NTSC: 1080p@30 fps,720p@30 fps,720p@60 fps CVBS: PAL: 960×576H; NTSC: 960×480H			
Resolution		1080p (1920×1080); 720p (1280×720); 960H (704×576/704×480)			
BLC		BLC/HLC/DWDR			
WDR		DWDR			
White Balance		Auto; Manual			
Gain Control		Auto; Manual			

Noise Reduction	2D NR
Smart Light	Yes
Mirror	Off/On
Privacy Masking	Off/On (8 area, rectangle)
Certification	
Certifications	CE (EN55032, EN55024, EN50130-4,EN60950-1) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
Interface	
Audio Interface	Built-in mic(-A)
Port	
Video Port	Video output choices of CVI/TVI/AHD/CVBS by one BNC port
Power	
Power Supply	12V ±30% DC
Power Consumption	Max 4.9W (12V DC, white light on)
Environment	
Operating Temperature	–40°C to +60°C (–40°F to 140°F); <95% (non-condensation)
Storage Temperature	–40°C to +60°C (–40°F to 140°F); <95% (non-condensation)
Protection Grade	IP67
Structure	
Casing	Metal front cover+plastic main body+metal bracket
Dimensions	304 mm × 108.4 mm × 90.8 mm (11.97" × 4.27" × 3.57")
Net Weight	0.79 kg (1.74 lb)
Gross Weight	1 kg (2.20 lb)

## Ordering Information

Type	Part Number	Description
2M Camera	DH-HAC-HFW1239MHP-LED 3.6 mm	2M Full-color HDCVI Bullet Camera, PAL
	DH-HAC-HFW1239MHN-LED 3.6 mm	
	DH-HAC-HFW1239MHP-LED 6 mm	2M Full-color HDCVI Bullet Camera, NTSC
	DH-HAC-HFW1239MHN-LED 6 mm	
	DH-HAC-HFW1239MHP-A-LED 3.6 mm	2M Full-color HDCVI Bullet Camera, PAL
	DH-HAC-HFW1239MHN-A-LED 3.6 mm	
	DH-HAC-HFW1239MHP-A-LED 6 mm	2M Full-color HDCVI Bullet Camera, NTSC
	DH-HAC-HFW1239MHN-A-LED 6 mm	
Accessories	PFA130-E+PFA152-E	Junction Box+Pole Mount Bracket
	PFA130-E	Junction Box
	PFA152-E	Pole Mount Bracket
	PFM820	UTC Controller
	PFM800-E	Passive HDCVI Balun
	PFM800-4K	Passive Video Balun
	PFM800B-4K	Passive Video Balun
	PFM321	12V 1A Power Adapter
	PFM300	12V 2A Power Adapter
	PFM320D-015	12V 1.5A Power Adapter

## Accessories

### Optional:



PFA130-E+PFA152-E  
Junction Box+  
Pole Mount Bracket



PFA130-E  
Junction Box



PFA152-E  
Pole Mount Bracket



PFM820  
UTC Controller



PFM800-E  
Passive HDCVI Balun



PFM800-4K  
Passive Video Balun



PFM800B-4K  
Passive Video Balun




PFM321  
12V 1A Power Adapter



PFM300  
12V 2A Power Adapter



PFM320D-015  
12V 1.5A Power Adapter

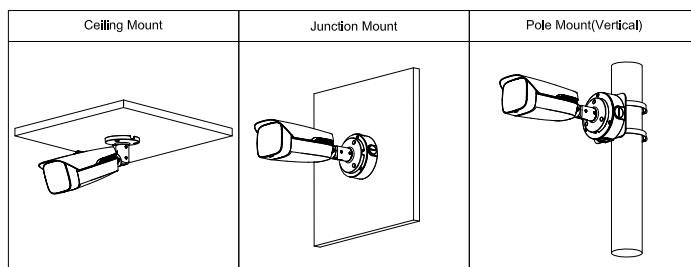

### Dimensions (mm[inch])

