

DH-HAC-T2A21P-U-A

2MP IR HDCVI Fixed-focal Eyeball Camera



- Max. 30 fps@1080p.
- Smart IR Illumination.
- 30 m illumination distance.
- Built-in Mic.
- 3.6 mm fixed lens (2.8 mm, 6 mm optional).
- CVI/CVBS/AHD/TVI switchable.
- IP67, 12 VDC.



Series Overview

The Cooper Series offers simple and highly cost-effective HDCVI solutions. It provides 24/7 reliable monitoring with high-quality image performance, saving cost on both material and labor force. It is also designed and built to the specific standards of Dahua.

Functions

Smart IR Illumination

With its IR illumination, the camera provides optimal performance in low light conditions, ensuring uniformity in the brightness of B/W images. Through its smart IR technology, the camera also compensates for the distance of targets by adjusting the intensity of its IR LEDs, preventing overexposure of images as targets move closer to the camera.

Broadcast-quality Audio

Audio signal transmission over coaxial cables is supported by the HDCVI camera. It adopts a unique audio processing and transmission technology that restores source audio and eliminates noise, ensuring the quality and reliability of the audio information that is collected. This becomes important for video surveillance applications that use audio information as a type of supplementary evidence.

Protection (IP67, Wide Voltage)

IP67: The camera passed a series of rigorous dust and immersion tests. Its enclosure is both dust-proof and waterproof, and can function normally while being immersed in 1 m deep water for up to 30 minutes. Wide voltage: The camera has $\pm 30\%$ input voltage tolerance (for some power supplies) and a wide voltage range, making it suitable for a variety of outdoor scenarios.

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals (video, audio*, data and power) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms. HDCVI technology also supports PoC, which makes the camera easy and quick to install.

* Audio input is available for select HDCVI camera models.

Long Distance Transmission

HDCVI technology provides long distance transmission in real time without transmission loss. It supports transmission distances up to 700 m for 2-MP/5-MP/8-MP HD videos through coaxial cables, and up to 300 m through UTP cables. The results were obtained and verified through rigorous testing in Dahua's test laboratory.


Simplicity

HDCVI technology inherits the simplicity of traditional analog surveillance systems, making it a great mechanism for protecting your valuables. HDCVI can be upgraded from the traditional analog system without replacing the existing coaxial cabling. Its plug and play design enables it to produce high-definition videos during surveillance without the hassle of configuring a network.


Technical Specification						Day/Night	Auto(ICR)/Color/B/W			
Camera		BLC				BLC	BLC; DWDR			
Image Sensor	2 MP CMOS	WDR				WDR	DWDR			
Max. Resolution	1920 (H) × 1080 (V)	White Balance				White Balance	Auto			
Scanning System	Progressive	Gain Control				Gain Control	Auto			
Electronic Shutter Speed	PAL: 1/25 s–1/100000 s; NTSC: 1/30 s–1/100000 s	Noise Reduction				Noise Reduction	2D NR			
Min. Illumination	0.02 lux@F2.0 (Color, 30 IRE) 0.002 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on)	Illumination Mode				Illumination Mode	Smart IR			
S/N Ratio	>65 dB	Certification								
Illumination Distance	30 m (98.43 ft)	Certifications	CE-LVD: EN 62368-1; CE-EMC: EN 55032; EN 55035							
Illuminator On/Off Control	Auto;Manual	Port								
Illuminator Number	2 (IR light)	Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port							
Angle Adjustment	Pan: 0°–360° Tilt: 0°–78° Rotation: 0°–360°	Audio Input	One channel built-in Mic							
Lens						Power				
Lens Type	Fixed-focal	Power Supply	12 VDC ± 30%							
Lens Mount	M12	Power Consumption	Max 2.8 W (12 VDC, IR on)							
Focal Length	2.8 mm; 3.6 mm; 6 mm	Environment								
Max. Aperture	F2.0	Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)							
Field of View	2.8 mm: H: 100°; V: 54°; D: 117° 3.6 mm: H: 80°; V: 43°; D: 94° 6 mm: H: 43°; V: 24°; D: 50°	Operating Humidity	<95% (RH), non-condensing							
Iris Control	Fixed	Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)							
Close Focus Distance	2.8 mm: 0.5 m (1.64 ft) 3.6 mm: 0.8 m (2.62 ft) 6 mm: 2.4 m (7.87 ft)	Storage Humidity	<95% (RH), non-condensing							
DORI Distance	Lens	Detect	Observe	Recognize	Identify	Protection	IP67			
	2.8 mm	44.7 m (146.65 ft)	17.9 m (58.73 ft)	8.9 m (29.20 ft)	4.5 m (14.76 ft)	Anti-corrosion Level	Basic Protection			
	3.6 mm	55.0 m (180.45 ft)	22.0 m (72.18 ft)	11.0 m (36.09 ft)	5.5 m (18.04 ft)	Structure				
	6 mm	102.9 m (337.6 ft)	41.1 m (134.84 ft)	20.6 m (67.59 ft)	10.3 m (33.79 ft)	Casing Material	Metal			
*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.						Product Dimensions	Φ94.0 mm × 77.9 mm (Φ3.70" × 3.07")			
						Net Weight	0.27 kg (0.60 lb)			
						Gross Weight	0.33 kg (0.73 lb)			
						Installation	Wall mount; ceiling mount; vertical pole mount			
Video										
Video Frame Rate										
Resolution										

Ordering Information

Type	Model	Description
2MP Camera	DH-HAC-T2A21P-U-A	2MP IR HDCVI Fixed-focal Eyeball Camera, PAL
	DH-HAC-T2A21N-U-A	2MP IR HDCVI Fixed-focal Eyeball Camera, NTSC
Accessories (Optional)	PFA13A-E	Junction Box
	PFB205W-E	Wall Mount Bracket
	PFA152-E	Pole Mount Bracket
	PFA106	Adapter Plate of Mini Dome & Eyeball Camera
	PFB220C	Ceiling Mount Bracket
	PFM800-E	Passive HDCVI Balun
	PFM321D	12V 1A Power Adapter
	PFM904	Integrated Mount Tester

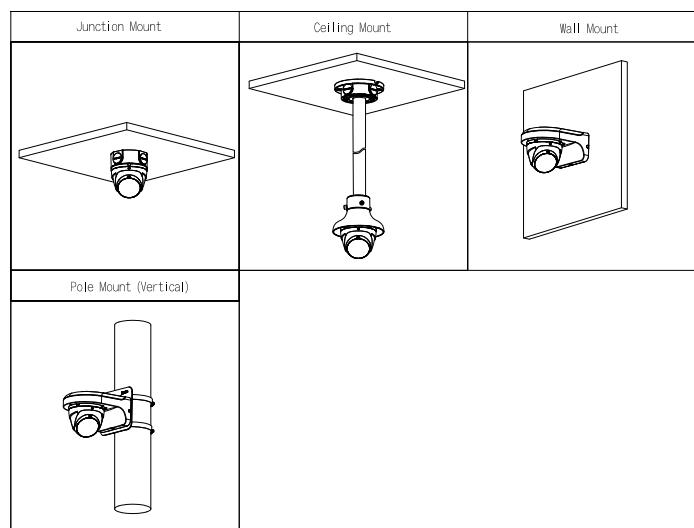

Dimensions (mm[inch])

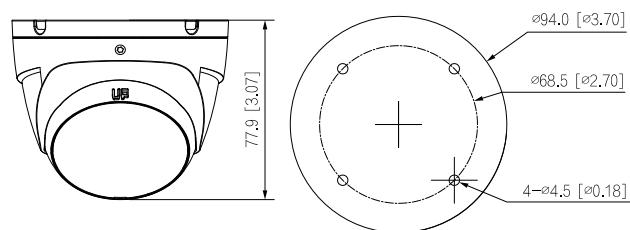

Accessories

Optional:



PFA13A-E
Junction Box



PFB205W-E
Wall Mount Bracket



PFA152-E
Pole Mount Bracket



PFA106
Adapter Plate of Mini
Dome & Eyeball Camera



PFB220C
Ceiling Mount Bracket



PFM800-E
Passive HDCVI Balun



PFM321D
12V 1A Power
Adapter



PFM904
Integrated Mount Tester