

DH-XVR1A04/08

4/8 Channel Penta-brid 1080N/720P Cooper 1U Digital Video Recorder



- H.264 video compression
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 5/10 channels IP camera inputs, each channel up to 2MP/5MP; Max 20/40Mbps Incoming Bandwidth
- Long transmission distance over coax cable
- Supports 1 SATA HDD, up to 6TB



System Overview

Dahua, as a technology leader, is always the first ever developed the shining new technology in the security industry ,and today we present Cooper Series XVR. Designed as a full compatibility product, XVR is able to provide end user the simplicity of analog system, namely lower system cost, simple installation and use of existing cable. It is ideal for a wide range of civil applications such as retail store, home protection and so on.

Featuring high performance with attractive costs, the Cooper Series offers a great solution for users facing budget constraints who both require quality and performance.

Functions

HDCVI/AHD/TVI/CVBS/IP Auto-detect

The XVR can auto recognize the signal of front-camera without any setting. It makes operation more friendly and convenient.

IPC Input Supported

The XVR1A04 supports up to 2MP IPC input, and XVR1A08 supports up to 5MP IPC input.

Coaxial Audio/Upgrade/Alarm

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

Long Distance Transmission

The HDCVI system supports long distance transmission over coaxial cable and UTP, max. 800m for 1080P and 1200m for 720P.

Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

Perfect Image Quality

High performance chip provides perfect image quality with better color reproduction.

P2P




Monitor at anytime and anywhere. Easily and conveniently mange the device.

Technical Specification		Video Detection and Alarm	
System		Trigger Events	
Main Processor	Embedded Processor	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips	
Operating System	Embedded LINUX	Video Detection	
Video and Audio		Motion Detection, MD Zones: 396 (22 x 18), Video Loss, Tampering and Diagnosis	
Analog Camera Input	4/8 Channel, BNC	Alarm input	
HDCVI Camera	1080P@25/30fps, 720P@25/30fps	N/A	
AHD Camera	1080P@25/30, 720P@25/30fps	Relay Output	
TVI Camera	1080P@25/30, 720P@25/30fps	N/A	
CVBS Camera	PAL/NTSC	Playback and Backup	
IP Camera Input	4CH: 4+1, each channel up to 2MP 8CH: 8+2, each channel up to 5MP	Playback	4CH: 1/4 8CH: 1/4/9
Audio In/Out	1/1, RCA	Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Two-way Talk	Reuse audio in/out, RCA	Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Recording		Backup Mode	USB Device/Network
Video Compression	H.264	Storage	
Resolution	1080N, 720P, 960H, D1, HD1, BCIF, CIF, QCIF	Internal HDD	1 SATA Port, up to 6TB capacity
Record Rate	Main Stream: 4CH: All channel 1080N/720P/960H/D1/HD1/BCIF/CIF/ QCIF(1~25/30fps) 8CH: the 1st channel 1080N/720P(1~25/30fps), others 1080N(1~12fps)/720P(1~15fps); 960H/D1/HD1/BCIF/CIF/ QCIF(1~25/30fps) Sub stream: 4CH: CIF/QCIF (1~15fps) 8CH: CIF/QCIF (1~7fps)	eSATA	N/A
Video Bit Rate	32Kbps ~ 4096Kbps Per Channel	Auxiliary Interface	
Record Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop	USB	2 USB 2.0
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec	RS232	N/A
Audio Compression	G.711A, G.711U, PCM	RS485	N/A
Audio Sample Rate	8KHz, 16 bit Per Channel	Electrical	
Audio Bit Rate	64Kbps Per Channel	Power Supply	DC12V/1.5A
Display		Power Consumption (Without HDD)	<10W
Interface	1 HDMI ,1 VGA	Construction	
Resolution	1920x1080, 1280x1024, 1280x720, 1024x768	Dimensions	Cooper 1U, 197mmx192mmx41mm (7.8"x7.6"x1.6")
Multi-screen Display	When IP extension mode not enabled: 4CH: 1/4 8CH: 1/4/8/9 When IP extension mode enabled: 4CH: 1/4/6 8CH: 1/4/8/9/16	Net Weight (without HDD)	0.55kg (1.2lb)
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	Gross Weight	1kg (2.2lb)
Network		Installation	Desktop installation
Interface	1 RJ-45 Port (100M)	Environmental	
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter ,DDNS, FTP, Alarm Server, P2P, IP Search (Supports Dahua IP camera, DVR, NVS, etc.)	Operating Conditions	-10°C ~ +45°C (+14°F ~ +113°F), 10~ 90% RH
Max. User Access	128 users	Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F) , 0~ 90% RH
Smart Phone	iPhone, iPad, Android	Third-party Support	
Interoperability	ONVIF 16.12, CGI Conformant	Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
Certifications		Certifications	
		FCC: Part 15 Subpart B	
		CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024	
		UL: UL 60950-1	

Ordering Information

Type	Part Number	Description
4/8 Channel XVR	DH-XVR1A04	4 Channel Penta-brid 1080N/720P Cooper 1U Digital Video Recorder
	DH-XVR1A08	8 Channel Penta-brid 1080N/720P Cooper 1U Digital Video Recorder

Dimensions(mm)

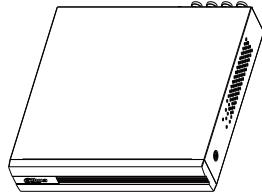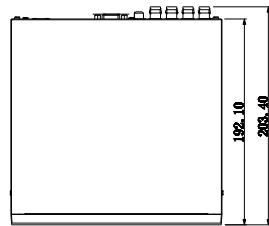


DH-XVR1A04


DH-XVR1A08

Rear Panel

DH-XVR1A04

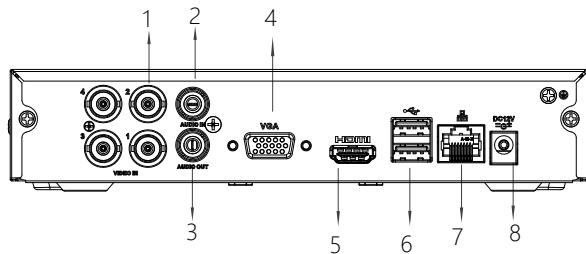

DH-XVR1A08

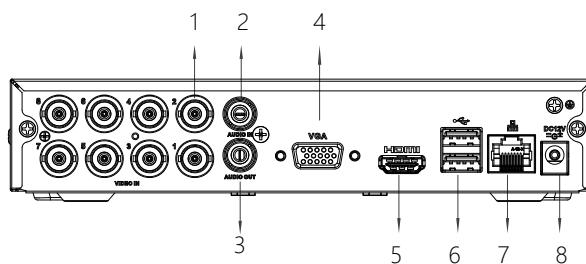

1	VIDEO IN	5	HDMI Interface
2	AUDIO IN, RCA Connector	6	USB Interface
3	AUDIO OUT, RCA Connector	7	Network Interface
4	VGA Interface	8	DC12V Power Input