

DH-HAC-B2A21-U

2MP IR HDCVI Fixed-focal Bullet Camera



- Max. 30 fps@1080p.
- Smart IR Illumination.
- 30 m illumination distance.
- 3.6 mm fixed lens (2.8 mm, 6 mm optional).
- CVI/CVBS/AHD/TVI switchable.
- IP67, 12 VDC.



Series Overview

The Cooper Series offers simple and highly cost-effective HDCVI solutions. It provides 24/7 reliable monitoring with high-quality image performance, saving cost on both material and labor force. It is also designed and built to the specific standards of Dahua.

Functions

Smart IR Illumination

With its IR illumination, the camera provides optimal performance in low light conditions, ensuring uniformity in the brightness of B/W images. Through its smart IR technology, the camera also compensates for the distance of targets by adjusting the intensity of its IR LEDs, preventing overexposure of images as targets move closer to the camera.

Protection (IP67, Wide Voltage)

IP67: The camera passed a series of rigorous dust and immersion tests. Its enclosure is both dust-proof and waterproof, and can function normally while being immersed in 1 m deep water for up to 30 minutes. Wide voltage: The camera has $\pm 30\%$ input voltage tolerance (for some power supplies) and a wide voltage range, making it suitable for a variety of outdoor scenarios.

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals (video, audio*, data and power) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms. HDCVI technology also supports PoC, which makes the camera easy and quick to install.

* Audio input is available for select HDCVI camera models.

Long Distance Transmission

HDCVI technology provides long distance transmission in real time without transmission loss. It supports transmission distances up to 700 m for 2-MP/5-MP/8-MP HD videos through coaxial cables, and up to 300 m through UTP cables. The results were obtained and verified through rigorous testing in Dahua's test laboratory.

Simplicity


HDCVI technology inherits the simplicity of traditional analog surveillance systems, making it a great mechanism for protecting your valuables. HDCVI can be upgraded from the traditional analog system without replacing the existing coaxial cabling. Its plug and play design enables it to produce high-definition videos during surveillance without the hassle of configuring a network.

Technical Specification						Resolution	1080p (1920 × 1080); 960H (960 × 576/960 × 480)																			
Camera		Day/Night	Auto(ICR)/Color/B/W																							
Image Sensor	2 MP CMOS	BLC	BLC; DWDR																							
Max. Resolution	1920 (H) × 1080 (V)	WDR	DWDR																							
Scanning System	Progressive	White Balance	Auto																							
Electronic Shutter Speed	PAL: 1/25 s–1/100000 s; NTSC: 1/30 s–1/100000 s	Gain Control	Auto																							
Min. Illumination	0.02 lux@F2.0 (Color, 30 IRE) 0.002 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on)	Noise Reduction	2D NR																							
S/N Ratio	>65 dB	Illumination Mode	Smart IR																							
Illumination Distance	30 m (98.43 ft)	Certification																								
Illuminator On/Off Control	Auto;Manual	Certifications	CE-LVD: EN 62368-1; CE-EMC: EN 55032; EN 55035																							
Illuminator Number	2 (IR light)	Port																								
Angle Adjustment	Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360°	Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port																							
Lens		Power																								
Lens Type	Fixed-focal	Power Supply	12 VDC ± 30%																							
Lens Mount	M12	Power Consumption	Max 2.8 W (12 VDC, IR on)																							
Focal Length	2.8 mm; 3.6 mm; 6 mm	Environment																								
Max. Aperture	F2.0	Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)																							
Field of View	2.8 mm: H: 100°; V: 54°; D: 117° 3.6 mm: H: 80°; V: 43°; D: 94° 6 mm: H: 43°; V: 24°; D: 50°	Operating Humidity	<95% (RH), non-condensing																							
Iris Control	Fixed	Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)																							
Close Focus Distance	2.8 mm: 0.5 m (1.64 ft) 3.6 mm: 0.8 m (2.62 ft) 6 mm: 2.4 m (7.87 ft)	Storage Humidity	<95% (RH), non-condensing																							
DORI Distance	<table border="1"> <thead> <tr> <th>Lens</th> <th>Detect</th> <th>Observe</th> <th>Recognize</th> <th>Identify</th> </tr> </thead> <tbody> <tr> <td>2.8 mm</td> <td>44.7 m (146.65 ft)</td> <td>17.9 m (58.73 ft)</td> <td>8.9 m (29.20 ft)</td> <td>4.5 m (14.76 ft)</td> </tr> <tr> <td>3.6 mm</td> <td>55.0 m (180.45 ft)</td> <td>22.0 m (72.18 ft)</td> <td>11.0 m (36.09 ft)</td> <td>5.5 m (18.04 ft)</td> </tr> <tr> <td>6 mm</td> <td>102.9 m (337.6 ft)</td> <td>41.1 m (134.84 ft)</td> <td>20.6 m (67.59 ft)</td> <td>10.3 m (33.79 ft)</td> </tr> </tbody> </table> <p>*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.</p>	Lens	Detect	Observe	Recognize	Identify	2.8 mm	44.7 m (146.65 ft)	17.9 m (58.73 ft)	8.9 m (29.20 ft)	4.5 m (14.76 ft)	3.6 mm	55.0 m (180.45 ft)	22.0 m (72.18 ft)	11.0 m (36.09 ft)	5.5 m (18.04 ft)	6 mm	102.9 m (337.6 ft)	41.1 m (134.84 ft)	20.6 m (67.59 ft)	10.3 m (33.79 ft)	Protection	IP67			
Lens	Detect	Observe	Recognize	Identify																						
2.8 mm	44.7 m (146.65 ft)	17.9 m (58.73 ft)	8.9 m (29.20 ft)	4.5 m (14.76 ft)																						
3.6 mm	55.0 m (180.45 ft)	22.0 m (72.18 ft)	11.0 m (36.09 ft)	5.5 m (18.04 ft)																						
6 mm	102.9 m (337.6 ft)	41.1 m (134.84 ft)	20.6 m (67.59 ft)	10.3 m (33.79 ft)																						
Video		Anti-corrosion Level	Basic Protection																							
Video Frame Rate	<p>CVI: PAL: 1080p@25 fps NTSC: 1080p@30 fps</p> <p>AHD: PAL: 1080p@25 fps NTSC: 1080p@30 fps</p> <p>TVI: PAL: 1080p@25 fps NTSC: 1080p@30 fps</p> <p>CVBS: PAL: 960H NTSC: 960H</p>	Structure																								
		Casing Material	Metal																							
		Product Dimensions	150.0 mm × 69.7 mm × 70.0 mm (5.91" × 2.74" × 2.76")																							
		Net Weight	0.27 kg (0.60 lb)																							
		Gross Weight	0.33 kg (0.73 lb)																							
		Installation	Wall mount; ceiling mount; vertical pole mount																							

Ordering Information

Type	Model	Description
2MP Camera	DH-HAC-B2A21P-U	2MP IR HDCVI Fixed-focal Bullet Camera, PAL
	DH-HAC-B2A21N-U	2MP IR HDCVI Fixed-focal Bullet Camera, NTSC
Accessories (Optional)	PFA134	Junction Box
	PFA130-E	Water-proof Junction Box
	PFA152-E	Pole Mount Bracket
	PFM800-E	Passive HDCVI Balun
	PFM321D	12V 1A Power Adapter
	PFM904	Integrated Mount Tester

Dimensions (mm[inch])

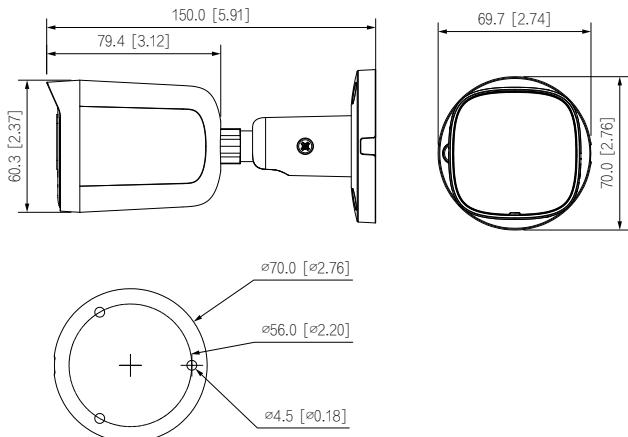

Accessories

Optional:



PFA134
Junction Box



PFA130-E
Water-proof Junction Box



PFA152-E
Pole Mount Bracket



PFM800-E
Passive HDCVI Balun



PFM321D
12V 1A Power
Adapter



PFM904
Integrated Mount Tester

DH-HAC-B2A21P-U

