

DH-XVR5216AN-I3

16CH Penta-brid 5MP Value/1080P 1U 2HDDs WizSense Digital Video Recorder



Wiz Sense

Launched by Dahua Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

Series Overview

Dahua Technology, a world-leading video-centric smart IoT solution and service provider, debuted its new XVR series, XVR5000-I3 Series featuring max.full-channel SMD Plus to benefit customers from AI upgrade (The number of channels differs depending on the model). Please refer to the specifications below for information on the number of channels.). This series has been developed to reduce false-alarm rates and the cost of human surveillance, thus bringing great value to customers in search of products with accurate human/vehicle alarm to raise the security level of various indoor and outdoor facilities.

Functions

Real 5MP Mode

This mode can enhance XVR preview and playback resolution to Real 5MP. Enable more clarity image experience.

Face Recognition

Dahua Face Recognition technology extracts the features of captured faces and compares them with that in face database to recognize the person identity.

*Face Recognition takes effect when Face is selected in AI Mode.

Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

*perimeter Protection takes effect when IVS&SMD is selected in AI Mode.

SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

*SMD Plus takes effect when SMD or IVS&SMD is selected in AI Mode.

- H.265+/H.265 dual-stream video compression
- Supports Full-channel AI Coding
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth
- Up to 4 channels video stream (analog channel) Perimeter Protection
- Up to 16 channels video stream (analog channel) SMD Plus
- Up to 2 channels video stream (analog channel) human face recognition
- IoT & POS functionalities



Smart Dual Illuminators

With Smart Dual Illuminators technology, you can select Smart Illumination Mode for the system to automatically switch between IR mode and white light mode. It allows white light to be turned on when a target is detected by the SMD Plus/Perimeter Protection function of AI-enabled XVR. This significantly reduces light pollution at night. Together with other modes, including IR Mode and White Light Mode, the smart dual illumination technology can meet the requirements of a wide variety of scenes.

One-click Arming/Disarming

With just one click, you can enable or disable alarm linkages to show messages, send emails, output audio alarms and more, through the mobile app and platform.

Customizable Alarm Audio

Designed for your convenience, the TIOC alarm can be customized to meet your needs. It is flexible, allowing you to directly upload your customized audio through the mobile app and XVR.

AI Coding

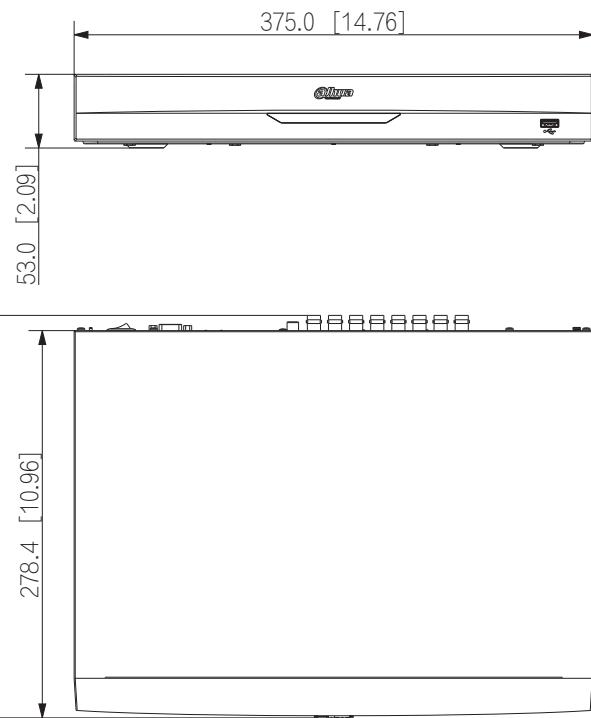
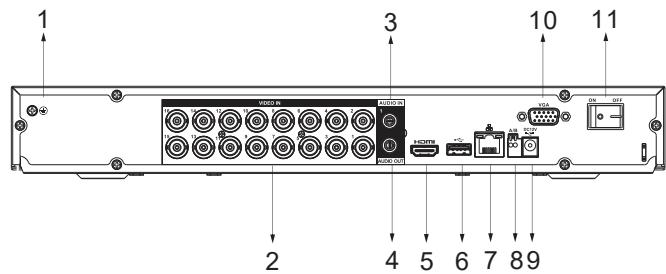
Compared with H.265/H.264, AI coding can reduce more than 50% bit rate and storage requirements without loss of decoding compatibility, providing clear human and vehicle details.

Audio over Coax

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

| Technical Specification | | Audio Bit Rate | 64 Kbps |
|---|---|---------------------------|--|
| System | | Bit Rate Type | Video stream and composite stream. |
| Main Processor | Embedded processor | Video Output | 1 HDMI, 1 VGA VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 It changes to 1920 × 1080, 1280 × 1024, 1280 × 720 when Face or IVS&SMD is selected in AI Mode. |
| Operating System | Embedded Linux | Multi-screen Display | When IP extension mode not enabled: 1/4/8/9/16 When IP extension mode enabled: 1/4/8/9/16/25 |
| Operating System | Web; Local GUI | Third-party Camera Access | Onvif, Panasonic, Sony, Axis, Arecont, Pelco, Canon, Samsung |
| Perimeter Protection | | Compression Standard | |
| Perimeter Performance AI by Recorder (Number of Channels) | Advanced Model: 2 channel, 10 IVS for each channel General Model: 4 channels, 10 IVS for each channel | Video Compression | AI Coding/H.265+/H.265/H.264+/H.264 |
| Face Detection | | Audio Compression | G.711A/G.711u/PCM |
| Face Attributes | Gender; age group; glasses; expressions; face mask; beard | Network | |
| Face Detection Performance of AI by Recorder (Number of Channels) | 2 channels (up to 12 face images/s) | Network Protocol | HTTP; HTTPS; TCP/IP; IPv4; IPv6; UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; FTP; DDNS; Alarm Server; P2P; Auto Registration; IP Search (Supports IP camera, DVR, NVR, etc.) |
| Face Recognition | | Mobile Phone Access | iPhone, iPad, Android |
| Face Database Capacity | Up to 10 face databases with 10000 face images in total. Name, gender, birthday, address, certificate type, certificate No., countries®ions and state can be added to each face picture | Interoperability | ONVIF 2.12(Profile T; Profile S; Profile G); CGI; SDK |
| Face Recognition Performance of AI by Recorder (Number of Channels) | 2 channels | Browser | Chrome, IE9 or above, Firefox |
| SMD Plus | | Network Mode | Single-address mode |
| SMD Plus by Recorder | 16 channels: Secondary filtering for human and motor vehicle SMD Plus, reducing false alarms caused by leaves, rain and lighting condition change | Recording Playback | |
| Audio and Video | | Record Mode | General, motion detection; intelligent; alarm; POS |
| Analog Camera Input | 16 BNC ports, CVI access by default, supports HDCVI/AHD/TVI/CVBS auto-detect | Recording Playback | 1/4/9/16 It changes to 1/4/9 split when Face or IVS&SMD is selected in AI Mode. |
| Camera Input | 1. CVI: 5MP@20fps, 5MP@25fps, 5MP@10/12.5fps, 4MP@25/30fps, 1080p@25/30fps, 720p@50/60fps, 720p@25/30fps. 2. TVI: 5MP@20fps, 4MP@25/30fps, 1080p@25/30fps, 720p@25/30fps. 3. AHD: 5MP@20fps, 4MP@25/30fps, 1080p@25/30fps, 720p@25/30fps. | Backup Method | USB Device/Network |
| IP Camera Input | Up to 24 channels of IPC access 8 IP channels by default + 16 channels (analog channels are converted to IP channels) incoming bandwidth: 128 Mbps, recording bandwidth: 128 Mbps and outgoing bandwidth: 128 Mbps *After IP channels are added beyond the existing channels, the AI Function (IVS, SMD, FACE) will be disabled. | Playback Mode | Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection) |
| Encoding Capacity | Main stream: 5MP Mode: 4-ch 5MP@(1-6fps); other channels 5M-N@(1-12fps) 5M-N Mode: All channel 5M-N@(1-12fps);4M-N,1080p@(1-15fps); 1080N, 720p, 960H, D1,CIF@(1-25/30fps) Sub stream: D1, CIF@(1-15fps) | Storage | |
| Dual-stream | Yes | Disk Group | Yes |
| Video Frame Rate | PAL: 1 fps–25 fps. NTSC: 1 fps–30 fps. | Alarm | |
| Video Bit Rate | 32 Kbps–6144 Kbps Per Channel | General Alarm | Motion detection, video loss, tampering |
| Audio Sampling | 8 KHz, 16 bit | Anomaly Alarm | No disk, disk error, low space, offline, ip conflict, MAC conflict |
| | | Intelligent Alarm | Face detection, face recognition, perimeter protection |
| | | Alarm Linkage | Record, snapshot (panoramic), IPC external alarm output, access controller, voice prompt, buzzer, log, preset, email |
| | | Ports | |
| | | Audio Input | 1-channel RCA (external) 16-channel BNC (coaxial audio) |
| | | Audio Output | 1-channel RCA |
| | | Two-way Talk | Yes (share the same audio input with the first channel) |
| | | HDD Interface | 2 SATA Ports, up to 16TB for a single HDD, the maximum HDD capacity varies with environment temperature |
| | | RS-485 | 1 Port, for PTZ Control |

| | |
|-----------------------|--|
| USB | 2 (1 front USB 2.0 port, 1 rear USB 3.0 port) |
| HDMI | 1 |
| VGA | 1 |
| Network Port | 1 (10/100/1000 Mbps Ethernet port, RJ-45) |
| General | |
| Power Supply | DC12V, 4A |
| Power Consumption | Lower than 12 W |
| Net Weight | 1.56 kg (3.44 lb) |
| Gross Weight | 2.86 kg (6.31 lb) |
| Product Dimensions | 1U, 375.0 mm × 289.4 mm × 53.0 mm 14.76" × 11.39" × 2.09" (W × D × H) |
| Packaging Dimensions | 433.0 mm × 141.0 mm × 366.0 mm 17.05" × 5.55" × 14.41" (W × D × H) |
| Operating Temperature | −10 °C to +55 °C (+14 °F to +131 °F) |
| Operating Humidity | 10%–90% |
| Installation | Desktop |
| Certifications | CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024 FCC: Part 15 Subpart B |

Dimensions (mm[inch])

Panels


- | | | | |
|----|-------------------------|----|--------------------------|
| 1 | Ground | 2 | VIDEO IN |
| 3 | AUDIO IN, RCA Connector | 4 | AUDIO OUT, RCA Connector |
| 5 | HDMI Port | 6 | USB Port |
| 7 | Network Port | 8 | RS-485 Port |
| 9 | Power Input | 10 | VGA Port |
| 11 | Power Switch | | |

| DH-XVR5216AN-I3